



Provides the **Best of the Wireless Networks**



Model Thyonet Broadband Dual Wireless Radio - Zeus AG400

Frequencies
2.4GHz Band:
 2400-2497MHz (*)
5GHz Band:
 5150-5850MHz (*)
 (*) programmable for different country regulations)

Standard Compliance IEEE 802.11a/b/g

Access Method TDD (CSMA/CA)



Channel Bandwidth 20 or 40 MHz (Selectable by Software)

Modulation technique DSSS/OFDM (BPSK,QPSK, 16-QAM, 64-QAM)

Output Power
2.4GHz Band:
 25dBm@6-24Mbps
 21dBm@54Mbps
5GHz Band:
 20dBm@6-24Mbps
 15dBm@54Mbps

Receive Sensitivity
2.4GHz Band:
 -95dBm@1Mbps
 -91dBm@6Mbps
 -74dBm@54Mbps
5GHz Band:
 -88dBm@6Mbps
 -70dBm@54Mbps

Certificates
 FCC Part 15
 WEEE Compliant
 RoHS

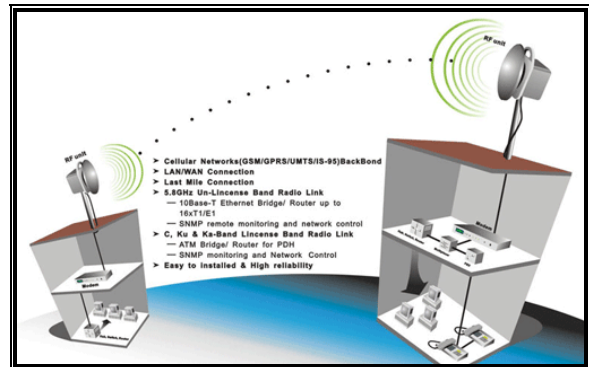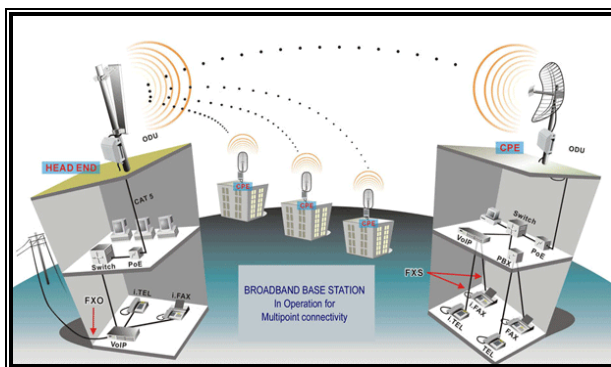



Provides the **Best of the Wireless Networks**



RF Operational Modes	<ul style="list-style-type: none"> Access Point (bridge or router function) WDS (bridge or router function) Repeater (bridge or router function) AP Client (bridge or router function) Station (bridge or router function) 	
Advanced Wireless Features	<ul style="list-style-type: none"> Tx Power and Tx Rate Antenna Selection ACK Timeout WMM - Wireless QoS Mac Address Spoofing Hide SSID and Stealth Mode Best Channel Selection and Country Code Selection DFS/TPC (Dynamic Frequency Selection / Transmit Power Control) Compression, Bursting, Fast Frames 802.11h Full Support Antenna Alignment (Site Survey / Link Quality / Signal Level) 	
Network Advanced Features	<ul style="list-style-type: none"> Transparent Bridging Layer 2 (Mac Address) Forwarding Layer 3 (IP Address) Forwarding Static Routing DHCP Server and Client PPPoE Client/PPTP Client Vlan (802.1Q) Support Advance Statistics Graphical User Interface Monitor Utils (Ping and Trace Route) 	
Firewall - NAT	<ul style="list-style-type: none"> Input/Output Interface Source IP/Subnet Port(s) Source Mac Destination IP/Subnet Protocol (ICMP, TCP, etc) Connection State(New, Established, etc) 	
Security Features	<ul style="list-style-type: none"> Access Control List WEP 64/128 WPA1/WPA2 with TKIP & AES ciphers 	
QoS - Bandwidth Management	<ul style="list-style-type: none"> Committed Information Rate (CIR) Peak Information Rate (PIR) Committed Burst Size (CBS) Excess Burst Size (EBS) Based in : <ul style="list-style-type: none"> - Input/Output Interface - Source IP/Subnet - Source Port(s) - Source Mac - Destination IP/Subnet - Destination Port(s) - Destination Mac - Protocol (FTP, ICMP, TCP, etc) - Application (Peer to Peer, EDonkey, Kazza, IRC, etc) 	
Hot Spot Features	<ul style="list-style-type: none"> WAN, LAN, DHCP, Firewall – NAT QoS - Bandwidth Management Wireless Radius Client UAM Authentication, Mac Address Authentication Walled Garden Advertisement Sites Log in Page Customization Users Info, Radius Statistics 	
Administration Tools	<ul style="list-style-type: none"> SNMP Agent NTP Agent HTTP Server SSH 	